

OREWORK®

PRO DIAL PROGRAMMER 2 OUTPUTS

PROGRAMADOR PRO DIAL 2 SALIDAS



PROGRAMADOR PRO DIAL 2 SAÍDAS

PROGRAMMATEUR PRO DIAL 2 SORTIES



TECHNICAL SPECIFICATIONS

Model:	HCT-M06
Size:	113x61x113 mm
Weight:	350 grs
Certification:	IPX5
Working pressure:	0,5 - 8,0 Bar
Working temperature:	3-45° C
Connections:	3/4"
Batteries:	2x1,5 V 'AAA' Alkaline

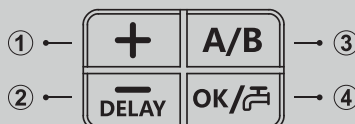

ON: Switching on

OFF: Turns off the programmer / all functions

SET CLOCK: Set the time

START TIME: Start of watering

HOW LONG: Determines the duration of watering

HOW OFTEN: Choose the frequency of watering

① Magnification button

② Watering decrease/delay button

③ A / B zone button

④ Confirmation button / manual watering

FEATURES

- Internal membrane mechanism.
- R/H 3/4" adaptor socket.
- Uses 2 x 1.5 volt AAA batteries (not included).
- Operating pressure from 0.5 to 8 bar.
- Watering frequency from 1 hour to 23 hours or 1 day to 15 days.
- Watering duration, from 1 to 240 minutes.
- Safety lock button.
- Large display for easy programming.
- IPX5 protection against water and dust.
- DELAY function.

EASY AND SIMPLE SETTING

MANEJO FÁCIL Y SENCILLO

CONFIGURAÇÃO FÁCIL E SIMPLES

RÉGLAGE FACILE ET SIMPLE

